

Schválena: 21. 10. 1952a


ČESKOSLOVENSKÁ STATNÍ NORMA (STANDARD) SMĚRNÁ

ODTLAČOVACÍ ŠROUBY s hrotem

ВИНТЫ ОТЖИМНЫЕ СО СТУПЕНЧАТЫМ КОНЦОМ

ČSN 02 1116

Nahrazuje ČSN 1308, tab. II

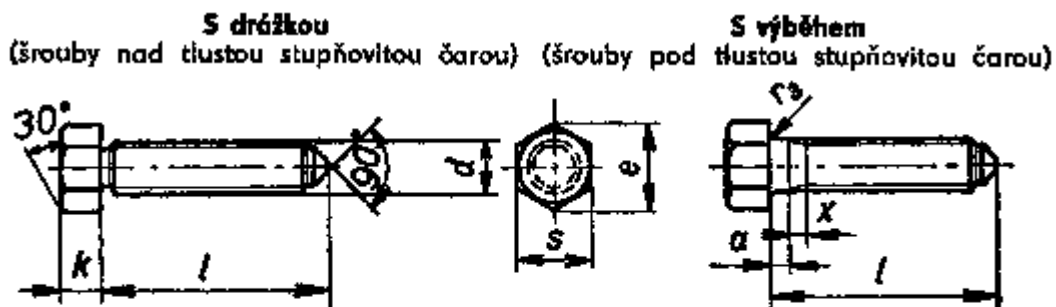

Označení odtlačovacího šroubu s hrotem, se závitem M 10, s délkou $l = 40$ mm s mechanickými vlastnostmi 5 S*):
Šroub M 10 × 40 ČSN 02 1116

Rozměry mm, váhy kg

Závit	M6	M8	M10	M 12	M 16	M 20	M 24	M 30	M 36X3
a	0, 8	1, 0	1, 25	1, 25	1, 5	2	2, 25	2, 5	2, 25
e≈	10, 4	12, 7	16, 2	19, 6	21, 9	25, 4	31, 2	41, 6	53, 1
k	5	6	7	9	11	14	17	21	25
r3	0, 3	0, 5	0, 5	1	1	1	1, 6	1, 6	1, 6
s	9	11	14	17	19	22	27	36	46
Délka l	Váha 1000 šroubů ≈								
12	4, 51								
15	5, 03	8, 86							
18	5, 56	9, 80							
20	5, 90	10, 4	17, 7						
25	6, 69	12, 0	20, 1	33, 1					
30	7, 64	13, 6	22, 6	36, 6	60, 3				
35		15, 1	25, 1	40, 5	66, 9				
40		16, 7	27, 6	43, 8	73, 5	119			
45			30, 0	47, 4	80, 1	129	201		
50			32, 5	51, 0	86, 6	139	216		
60				58, 1	99, 8	160	245	432	
70				65, 3	113	180	275	479	
80					126	201	304	526	850

90					139	221	354	573	919
100						242	364	620	986
120							423	713	1120
140								807	1260 i
160								901	1390
180									1530
200									1670

Listopad 1952

Schválil SÚP 21. 10. 1952

Platí od 1. 1. 1953

ČSST 517-52

00202