




**ŠROUBY S HLAVOU T
a se čtyřhranem**

Nezobrazitelný cizojazyčný text!

T - bolts with square neck

Rozměry v mm

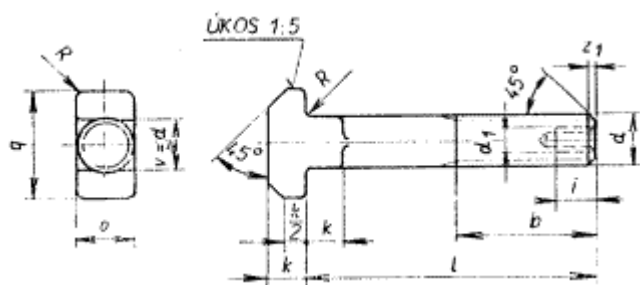

Označení šroubu s hlavou T a se čtyřhranem se závitem M 10, s délkou $l = 60$ a s mechanickými vlastnostmi 4D:

Šroub M10 x 60 ČSN 02 1343

d Závít ^{b)}	M 6	M 8	M 10	M 12	M 16	M 20	M 24	M 30	M 36x3	M 42x3
b ^{a)}	16	22	26	30	38	46	54	66	78	90
k	—	—	—	—	44	52	60	72	84	96
o	4,5	5,5	7	8	10,5	13	15	19	23	26
q	6	8	10	12	16	20	24	30	36	42
R	16	18	21	26	30	36	43	54	66	80
d ₁	0,3	0,5	0,5	1	1,2	1,2	1,6	1,6	1,8	1,8
i	—	—	—	—	—	—	—	—	M 12	M 12
i	—	—	—	—	—	—	—	—	22	22
Délka l	Přibližná hmota 1000 šroubů v kg ^{e)}									
30	8,9									
35	10,0	18,0	29,7							
40	11,1	20,0	32,8							
45	12,2	22,0	35,8	53,8						
50	13,3	24,0	39,0	58,2	108					
55		26,0	42,1	62,6	116					
60		28,0	45,2	67,0	124	207				
65		30,0	48,3	71,4	132	219				
70		32,0	51,4	75,8	140	231				
75			54,5	80,2	148	243	320			
80			57,6	84,6	156	255	356			
90			63,8	93,4	172	279	392			
100			70,0	102	188	303	428	685		
110			76,2	111	204	327	464	—	—	
120			82,4	120	220	351	500	797	1263	
130				129	236	375	536	—	—	—
140				138	252	399	572	909	1423	—
150				147	268	423	608	965	1503	2118
160					284	447	644	1021	1583	2334

Tučně vytisklé délky l jsou přednostní.

(Pokrač.)

Nahrazuje ČSN 02 1343
ze 7.2.1953

Účinnost od:
1.1.1967

00237

-- Vynechaný text --